

MOBILE LIGHT TOWERS

*Your only solution for
Power to Illuminate*



POWERREGION

MOBILE LIGHT TOWERS

No matter what your lighting needs, **FIRMAN mobile light towers** offer the options and durability to deliver consistent, reliable light to your jobsite.

Built to light up the toughest job sites from construction and mining to oil field applications. The 30ft (9.14m) extended height floodlight tower provides 4000W of light. The 360° tower rotation permits pinpoint positioning of the light. The -20°C to 55°C working temperature enables lighting under extreme weather conditions.

At FIRMAN, delivering quality to customers is of highest priority. Every mobile light tower undergoes rigorous testing keeping in mind customer peace of mind and user friendliness in operating control.

Consistent lighting in extreme conditions, longer run times, convenient maintenance and easy to move

KEY BENEFITS

Compact structure

Easy to move and use

Longer service life

Lower energy consumption

Audible warning system for safety

Backed by International Warranty

FIRMAN[®]
POWER EQUIPMENT


POWER TO ILLUMINATE

Powerregion is proud to offer FIRMAN diesel fueled mobile light towers. Easy to handle and move, safety and exceptional build quality make these light towers truly stand out in extreme weather conditions.

POWERREGION

Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice.

MOBILE LIGHT TOWERS

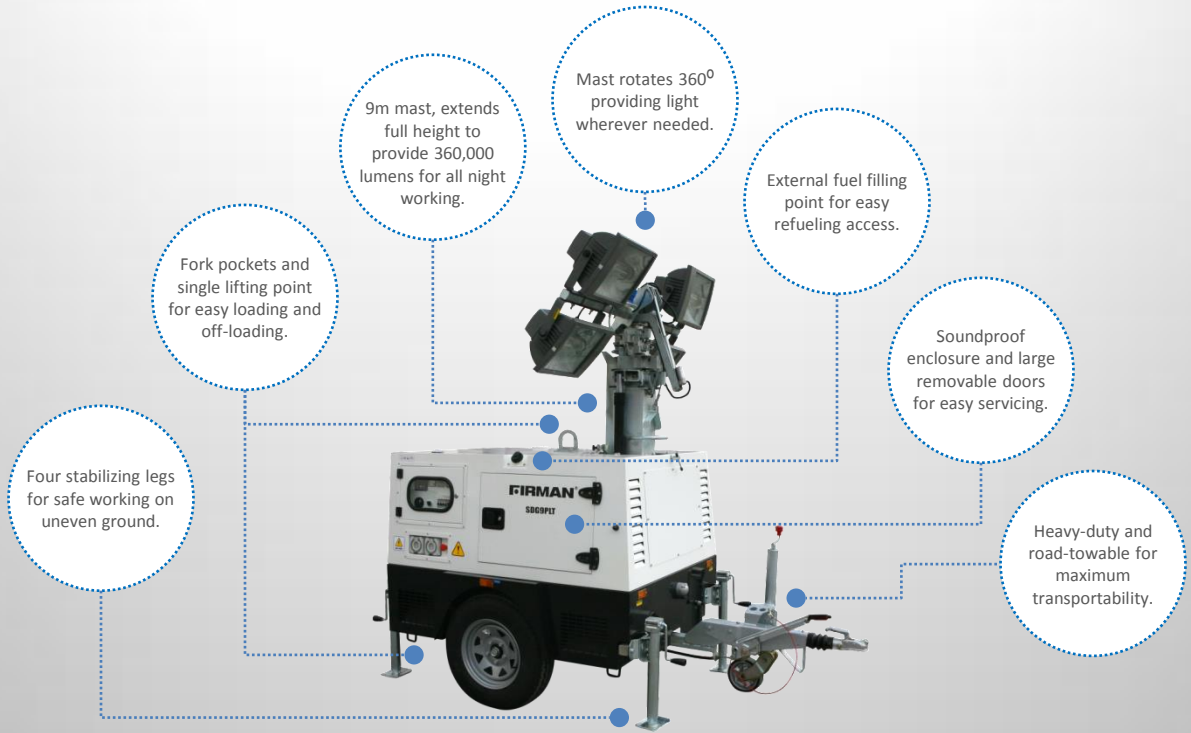

SDG9PLT / SDG9KLT / SDG9FLT

Engine	Brand	Perkins, Kubota, Firman
	Cooling	Water cooled
	Speed	1500Rpm
	Noise level @ 7m	64dbA
Mast	Manual / Electric telescopic mast with safety block, carrying four metal halide spotlights	
	Watt per lamp	1000
	Lumens per lamp	90000
	Total watts	4000
	Total lumens	360000
	Manual mast rotation	360°
	Raise mast to full height	Manual / Electric
	Lower mast to travel position	Manual / Electric
	Working temperature	-20°C to 55°C
Fuel	Type	Diesel
	Bunded fuel tank capacity (L)	100
	Fuel consumption (L/Hr)	1.47
	Run time for full tank (Hrs)	68
Volatage	Total voltage (V)	230
	Sockets 230V	1 x 16amps
	Maximum output	7.4KVA / 7.4KW
Dimensions and Weight	Maximum height of tower	30ft (9.14m)
	Length with mast stowed	170in (4.32m)
	Width	35.4in (0.9m)
	Width with outriggers extended in	96in (2.44m)
	Dry weight	740kg

ENERGY PORTFOLIO

GENERATOR POWER

PORTABLE GENERATORS



MOBILE LIGHT TOWERS



INDUSTRIAL GENERATORS




SOLAR POWER

SOLAR FARMS SOLAR ROOFTOPS



SOLAR AIR CONDITIONERS



SERVICES

GENERATOR RENTAL

ENERGY MANAGEMENT

REPAIRS AND MAINTENANCE

Authorized Dealer

POWERREGION